


One-way communication from business logic to views: Listener tag

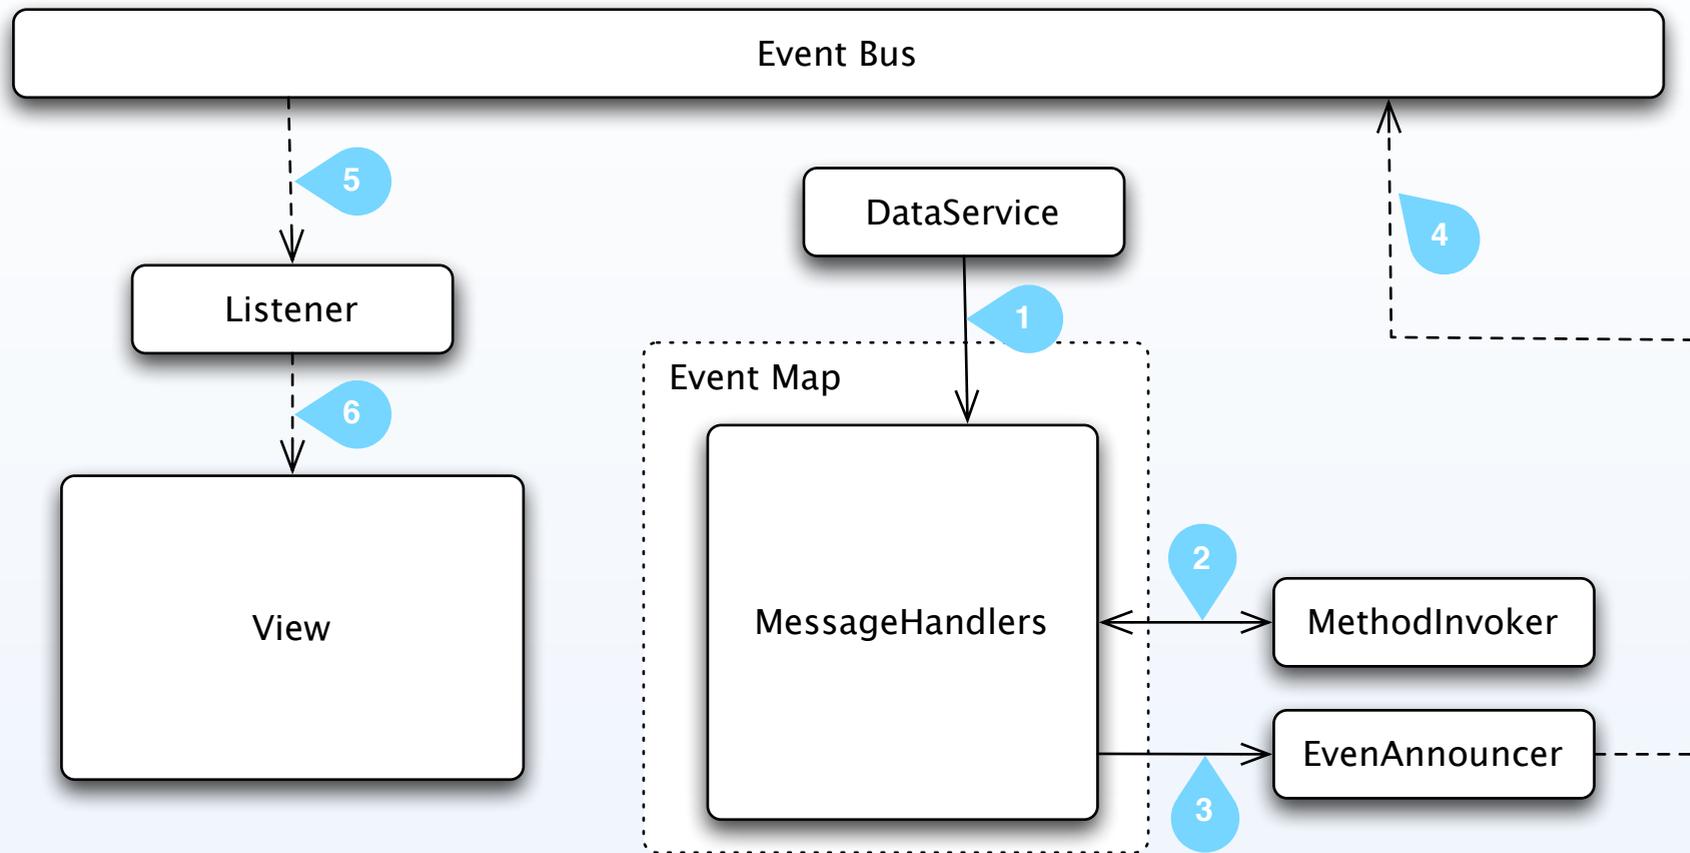

- 1 A DataService pushes data to the client. The message is caught by the **MessageHandlers**
- 2 Inside the **MessageHandlers**, a list of actions is executed in order. In this example, a "MethodInvoker" is used.
- 3 After that, an Event is created by an **EventAnnouncer**
- 4 The event is dispatched
- 5 A Listener tag receives this event because it is registered to listen for this event type
- 6 The view handles this event by a method or by the event handler in the Listener tag