


Two-way communication: Dispatcher and ResponseHandler tags

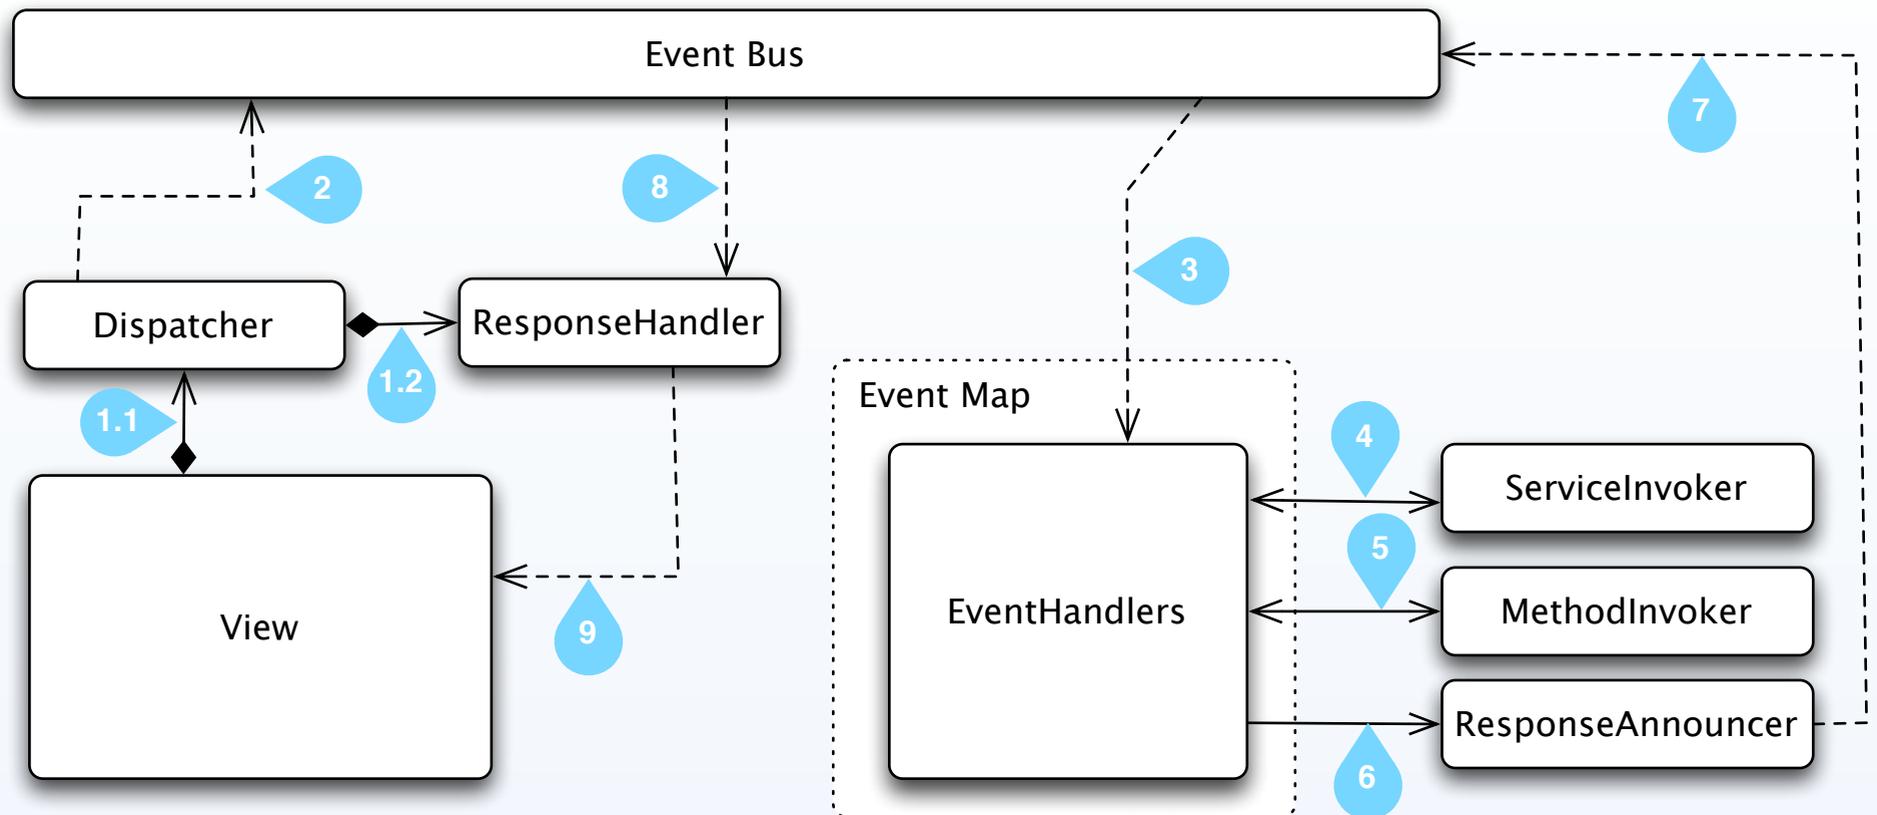

- 1 1.1) The View has a **Dispatcher** tag, 1.2.) and the **Dispatcher** tag has a **ResponseHandler** tag
- 2 View dispatches an event using the **Dispatcher** tag
- 3 The event arrives to an **EventHandlers** block in the EventMap that is registered to listen to this event type
- 4 Inside the **EventHandlers**, a list of actions is executed in order. In this example, a server call is made.
- 5 The second action is calling a method on a "worker". Those actions can be replaced for any other action
- 6 A Response with a specific type is announced using the **ResponseAnnouncer**
- 7 The response is sent back to the view
- 8 The event arrives to a **ResponseHandler** that matches the response type specified in the **ResponseAnnouncer**
- 9 The view receives the response in the "response" handler or receives it in a method call